

AVer CP Series

Quick Start Guide

Please read this guide fully before using the IFP


Thank you for purchasing the AVer CP Series IFP. Since this product left the manufacturing facility, AVer has since updated the IFP firmware with the latest software and patches. This guide will help you to quickly setup your Internet and connect to the AVer server over the Internet to update the firmware.

Setting up Internet/Network access on the AVer CP Series IFP

Locate the WiFi dongle sent separately in a box or in the package.




Plug the WiFi dongle into the USB3.0 or USB2.0 slot on the side of the panel as indicated below.

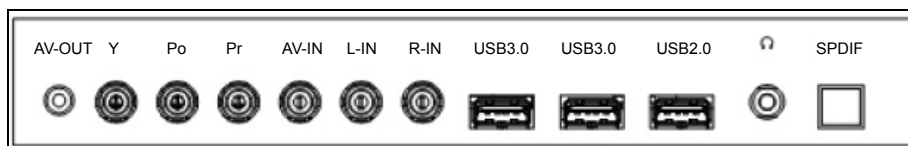


When the panel first boot up, you can either plug in an RJ45 Ethernet cable from the wall outlet or enable WiFi access. Using the Ethernet typically enhances the user experience due to less complication from WiFi congestions.


To setup WiFi:

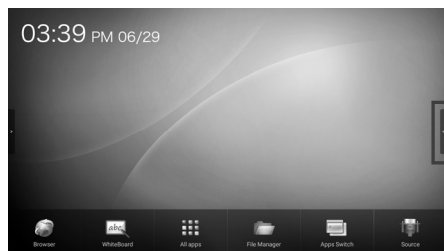


1. Press the arrow on either side of the panel to expand the Android Tool Bar

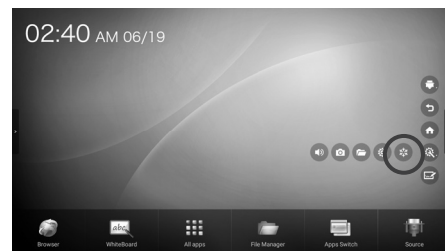

2. Press the **"Setup"** icon as indicated below to bring up the Android Settings for the panel

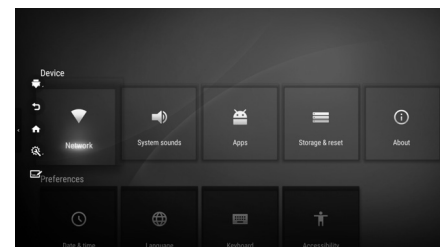


3. Press **"Network"** to access the network settings

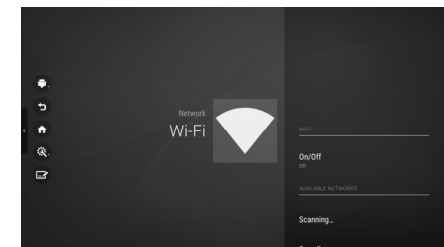


4. Select On/Off and set the Wi-Fi to **"On"**. Then proceed to select from all available Wi-Fi networks to connect to.

[Note] WiFi dongle is specific to the North American Market. You can however always access the Internet via an Ethernet RJ45 connector.


Updating the panel firmware

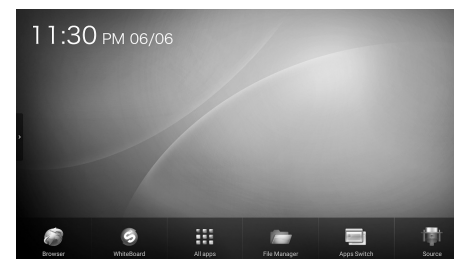

1. Go back to the main Android Home screen. Then press **"All apps"**

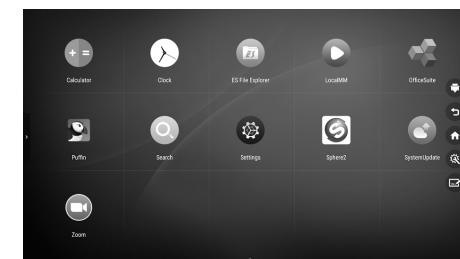


2. Select **"SystemUpdate"**

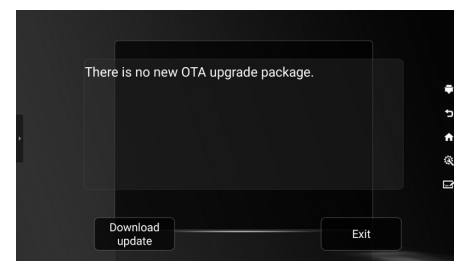

3. Press **"Download update"** and wait for the entire update process to complete.

Adjusting the Date/Time

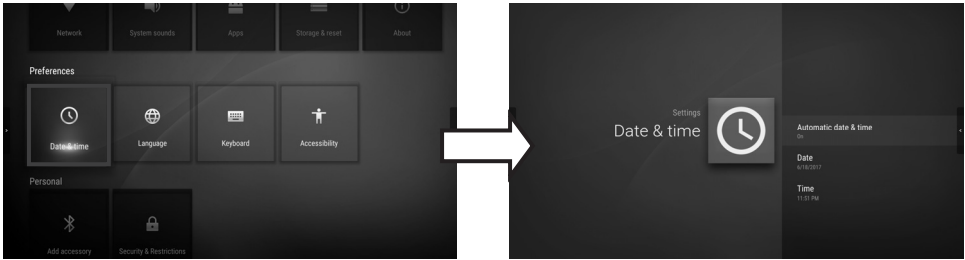


Go back to the Android “Settings” and select the “Date & Time” setting. Select “Time” and then “Set Time Zone”. Make sure the time zone is set to your correct zone.

Power off the panel

While in power on status, press power button on the Aver CP unit or on the remote controller and the power off message is displayed on screen; press power button again to turn off the AVer CP system.

Package Contents

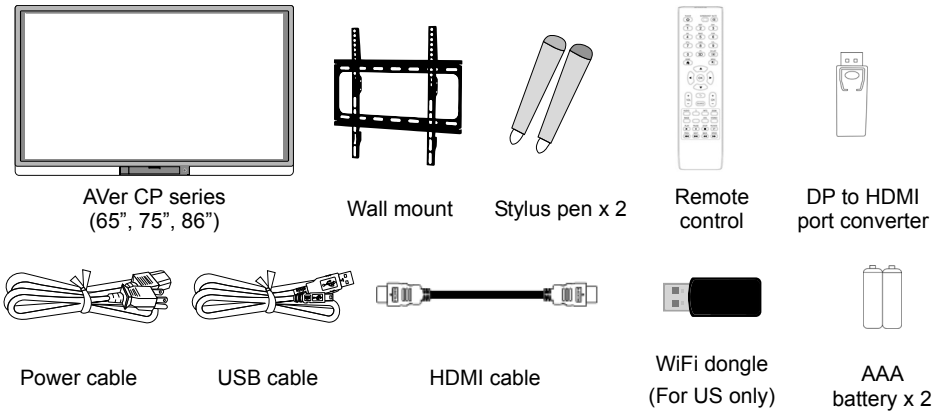


Optional Accessories

- 1. Floor stand
- 2. OPS


Wall Mount Kit Specification (VESA)

Size	VESA Spec.	Standard screw	Quantity
65"	400 x 400mm	M6 x 20 mm	4
75"	600 x 400mm	M8 x 20 mm	4
86"	700 x 400mm	M8 x 20 mm	4

Terminal Interface Overview

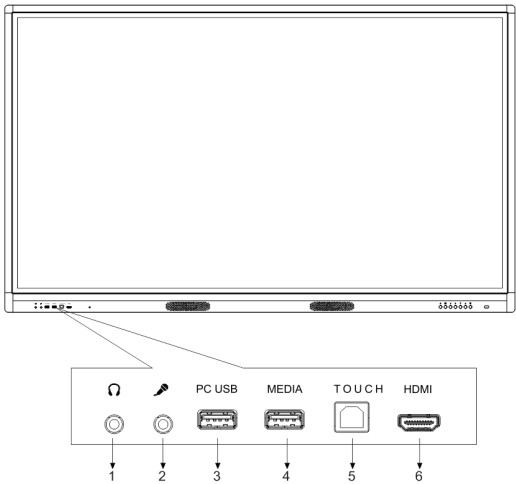


Item	Description
1	Headset port
2	MIC IN port
3	OPS-USB port
4	Android-USB port
5	TOUCH-USB port
6	HDMI IN port

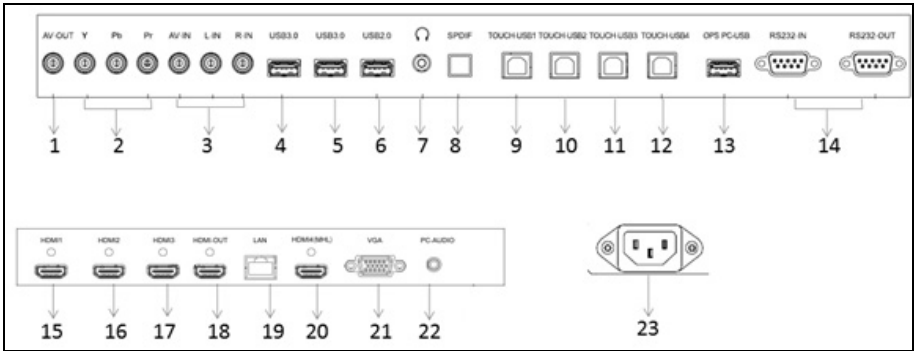


Item	Description	Item	Description	Item	Description
1	AV-OUT port	9	TOUCH-USB1 port	17	HDMI3 IN port
2	YPbPr IN ports	10	TOUCH-USB2 port	18	HDMI 1/2/3 OUT port
3	AV-IN port	11	TOUCH-USB3 port	19	LAN port
4	Android-USB port 3.0	12	TOUCH-USB4 port	20	HDMI4-IN port
5	Android-USB port 3.0	13	OPS-USB port	21	VGA-IN port
6	Android -USB port 2.0	14	RS232 IN/OUT port	22	VGA-AUDIO IN port
7	Headset port	15	HDMI1 IN port	23	POWER port
8	SPDIF OUT port	16	HDMI2 IN port		

Control Panel Overview

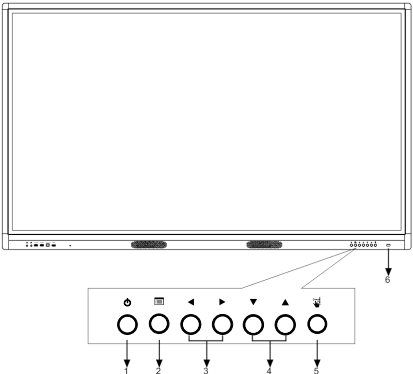

Item	Description
1	Power on/off
2	Press to show the OSD(On Screen Display) menu (Non Android screen))
3	VOL +/VOL - button; select or adjust menu options
4	Select or adjust menu options
5	Gesture control on/off (Long press > 2s to activate/inactivate)
6	Indicator and remote receiver
7	AC power On/Off switch


Remote Control

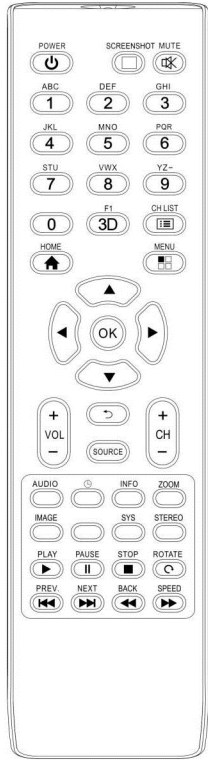

Name	Function
	Power on/off
SCREENSHOT	Take screenshot.
MUTE	Enable or disable sound.
NUMERIC KEYS	Input any number.
F1(FREEZE)	Enable or disable freeze function in the system (Only works in non-Android mode)
CH LIST	Allow backspace when input characters/view TV channel list (No used currently)
HOME	Jump back to Android Home
MENU	Display the on screen menu.
	Select or adjust menu options.
OK	Confirm the operation.
VOL +/-	Adjust volume.
	Return to the previous setting interface.
SOURCE	Display the source selection menu (Valid only in TV mode).
CH +/-	Turn channel up/down. (No used currently)
AUDIO	Select the sound mode.
SLEEP	Set the sleep time and auto standby when the specified time is reached.
ZOOM	Switch the channel display ratio on the screen.
IMAGE	Select the picture mode of the product.


Connection Diagram

Connect to the PC.
[Note] Disconnect the power plug before installing or removing the product.

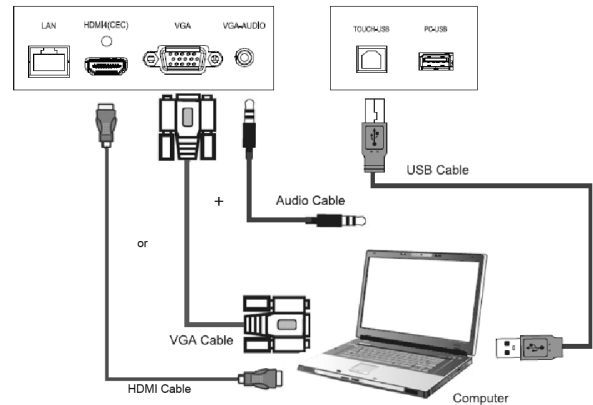

Remark: Either connect the HDMI cable (or VGA + Audio cable) from the external computer.

Connecting USB Peripherals

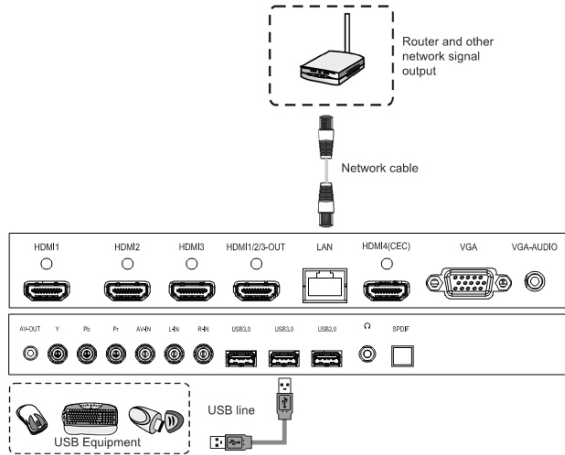


1. **WiFi Adapter (& other supported USB devices):** Plug into the USB IN port.
2. **Networking and modem cables:** Plug the router cable into the LAN port.

Remote Control Continued

Name	Function
SYS	Only for switching TV system.
	For operation of multimedia functions in the intelligent platform.
INFO	Display the content information of the input source.

HDMI Connections

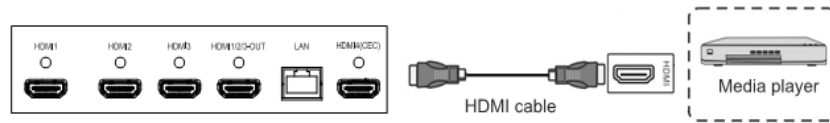

Software, FAQ, Training Videos, Warranty

Download The AVer Interactive software and for more support, please visit:

<http://www.aver.com/support/software/myndshare/> and select the country where the unit is purchased.

For more support, please call AVer below:

For US: Tel: 1-877-528-7824 | Email: support.usa@aver.com

For Global: Tel: +886-2-2269-8535 | <http://www.aver.com/Technical-Support>

Federal Communications Commission

NOTE - This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radiofrequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.



This product is herewith confirmed to comply with the requirements set out in the Council Directives on the Approximation of the laws of the Member States relating to Electromagnetic Compatibility Directive 2014/30/EU

Warning - This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

警告使用者：這是甲類的資訊產品，在居住的環境中使用時，可能會造成射頻干擾，在這種情況下，使用者會被要求採取某些適當的對策。