

The VB130 is an advanced, compact videobar designed for small to medium collaboration spaces. Elevate your meetings with intelligent features such as audio fencing, voice tracking, and SmartFrame technology.

# Razor sharp 4K video

Outstanding color and razor-sharp video up to 4K. Dual fields of view allow you to switch between 90° or 120° FOV for full room coverage of any workspace.



# Stay focused with advanced AI

The VB130 adapts to your meeting dynamics with voice tracking, audio fencing, people counting, and SmartFrame technology. Maintain a perfectly framed image with SmartFrame and never worry about ambient background noise again with audio fencing.




# Illuminate your call

Upgrade your meeting experience with our intelligent built-in lighting for virtual meetings. Adjustable 5-level fill lighting combined with an automatic light sensor provide the perfect amount of light to illuminate your workspace.



# **Professional audio**

Beamforming technology delivers a rich, resonant sound up to 15 feet to ensure everyone's voice is heard clearly. Our 5-microphone array with acoustics delivers a clear and professional sound for your meeting space.

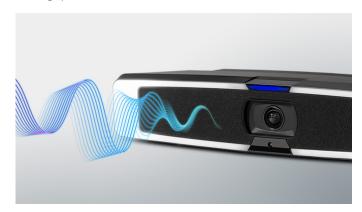

# Specifications

# Camera

- 4K optics lens, 120° FOV, up to 4X zoom
- Sony 4K sensor: ultra-crystal-clear image in any lighting
- Frame rates: (16:9) 4K, 1920 x 1080, 1600 x 900, 1280 x 720, 960 x 540, 848 x 480, 800 x 448, 640 x 360, at 60, 30, 15fps; (4:3) 1280 x 960, 800 x 600, 640 x 480 at 60, 30, 15fps
- Adjustable audio fence: freedom to define your meeting area
- Intelligent fill light: automatically adjusts lighting levels to illuminate your virtual meetings\*
- SmartFrame: automatic FOV adjustment to fit all participants
- SmartSpeaker: voice triggered people tracking or specific preset areas
- Mirror, flip, AE, white balance: auto/manual override via PTZApp 2
- Minimum focus distance: 60 cm
- People-counting API: enterprises and third-party software providers can obtain people-counting data for better understanding of meeting-space usage
- 10 camera presets (through remote control and AVer software)

\*For best lighting results, sit within 1 meter from the camera

#### Audio

- Beamforming microphone array: 5 microphones, 4 m pickup range
- Output volume: 94dB SPL +/-2dB at 0.5 meter
- Echo cancellation
- Noise suppression
- Supports expansion microphone
- 6Wx1 speaker with professional bass port tuned for communication
- 180Hz 20kHz Speaker frequency response

#### Connectivity

- 12V/2A power adapter
- Mini-B for expansion microphone connection
- USB Type-B 3.1 connector, backward compatible with USB 2.0
- RJ45 port for Ethernet
- USB 2.0 Type-A for wireless connection\*

\*Optional wireless dongle is required to connect with mobile phone

# Video Format

- YUV, YUY2, MJPEG
- Network video compression format: H.264
- Network protocols: RTSP, RTMP

# USB

• 3.1 Gen 1, backward compatible with USB 2.0 • UVC 1.1 (USB video), UAC 1.0 (USB audio)

#### Control

- IR remote control
- WebUI: IP access via Chrome browser (Chrome 76.x or later; Internet Explorer not supported)
- UVC/UVA plug-and-play
- PTZApp 2

#### Mount

- TV mount kit (included)
- Camera wall-mount bracket (optional)

# System Requirements

- •Windows® 7/10
- MacOS X 10.7 or later
- Google Chromebook™ version 29.0.1547.70

#### Hardware Specs

- 3.2 GHz Intel® Core™ i5-4460 processor
- 4 GB RAM or more
- USB 3.1 port, backward compatible with USB 2.0

# Power Supply

• AC 100V-240V, 50/60 Hz • Consumption: 12V/2A

## Free Applications for Meeting Collaboration (For Windows® and Mac® computers)

#### EZManager 2: Camera Central Management Software

• Remotely manage group FW/SW updates, camera control, and settings

# PTZApp 2: Camera Settings Software

- View live video, people-counting numbers, and meetinginterval information
- Enable Skype for Business far-end control
- Upgrade firmware automatically or manually
- Control the camera
- Set parameters and adjust the camera image
- Diagnose operating status

#### EZLive: Broadcasting Software

• Enjoy multi-camera real-time streaming, annotating, image capturing, and video recording

#### Environmental Data

- Operation temperature: 0 to 40°C
- Operation humidity: 20% to 80%
- Storage temperature: -20 to 60°C
- Storage humidity: 20% to 80%

# Dimensions (D x W x H)

- Package dimensions: 146 x 406 x 189 mm
- Package weight: 2.358 kg
- Videobar: 75 x 350 x 65 mm/0.922 kg
- Remote control: 149.72 x 42.3 x 19.29 mm/50 g

# Package contents

- VB130 video bar (SKU: COMMVB130)
- Power adaptor & cable (10ft) (SKU: CPWRVB130)
- USB 2.0 Type-B to Type-A Cable (15ft)
- TV mount and screws (SKU: COMVBMNT2)
- Remote control (SKU: COMLREMOT)
- Tripod screw
- QR code warranty card

#### Optional accessories

- Wall mount (SKU: COMVBMNT1)
- 10m expansion microphone (SKU: COMVBEMIC)
- 20m expansion microphone (SKU: COMVBM20M)
- BT Wireless dongle (SKU: COMVBTDON)

#### Warranty

- Camera: 3 years
- Accessories: 1 year

#### **Compatible applications**

 Zoom, Microsoft® Teams, Skype, Skype for Business, Google Meet, RingCentral, BlueJeans, Intel® Unite™, Fuze, Adobe® Connect™, CyberLink U Meeting®, Cisco WebEx® GoToMeeting™, LiveOn, Microsoft® Lync™, TrueConf, V-Cube, Vidyo, vMix, WebRTC, Wirecast, XSplit

\*For 4K UHD support, please check system/hardware requirements with your software application provider.

\*\*Specifications may vary depending on countries and are subject to change without notice.

Fill light Speaker Microphone Microphone LAN Color temperature button Expansion microphone port USB Type A (wireless dongle only) DC 12V Color sensor USB Type-B (device to PC) Light level button Distributor/Dealer



668 Mission Court, Fremont, CA 94539 T 408.263.3828 F 408.263.8132 toll free 1.877.528.7824 ©Copyright 2022, AVer Information Inc. All rights reserved. Specifications subject to change without notice.

AVer Information Inc. Americas averusa.com

