



HUB30

4x2 USB/HDMI BYOM Switch



4K Video Output




USB-C PD Powering



Support Dual Screen Display



Multi-Camera AI Auto Switching




Multiple Connection Ports

Introducing the HUB30 — a 4x2 BYOM HDMI/USB switch built to bring flexibility and intelligent collaboration to modern meeting rooms. Designed for new installations or to add BYOM to existing MTR, Zoom, or other setups, it delivers a complete, single-branded solution without costly subscriptions. With 100W USB-C charging, two sources, and wireless sharing through AVer Room Management Software, users can connect and switch devices effortlessly. ConnectAI enhances meeting equity with intelligent speaker recognition when paired with AVer cameras, and the CP10 G2 touchscreen panel enables seamless control of the room and AVer peripherals.


BYOD/BYOM Made Easy

Support any meeting, in any room, with HUB30's 4x2 USB/HDMI switch and multi-port connectivity including HDMI, USB-C, and DisplayPort. Dual 4K output enables expanded displays, while 100W USB-C Power Delivery keeps laptops charged through extended sessions—ensuring seamless workflow in corporate boardrooms, hybrid spaces, and AV environments.

Huddle Room

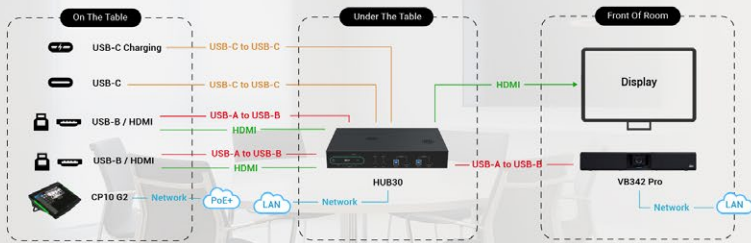

Medium Room

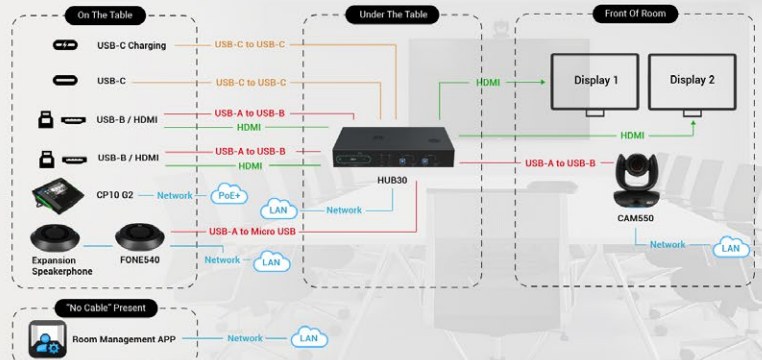

Intelligent Meeting Equity with ConnectAI

Paired with AVer cameras, ConnectAI enhances collaboration by recognizing active speakers and presenters, ensuring every participant is clearly seen and heard. This AI-driven experience delivers a more inclusive and equitable meeting environment.



Smart Multi-Camera Switching

Instantly switch between two AVer cameras via USB+IP or IP* using advanced AI algorithms for dynamic, multi-angle coverage. Ideal for hybrid meetings, live streaming, and video production, it enables smooth transitions and automatic camera control for a broadcast-grade experience.

**NOTE: IP connection supports since firmware 0.0.0000.18*



Wireless Content Sharing Engaging Presentations

Wirelessly share content through AVer's Room Management Software for fluid transitions between speakers and devices. Create compelling presentations and professional video conferencing experiences without cables—enhancing collaboration and communication across any meeting environment.



Dual Display & Multi-User Flexibility

Boost productivity with true dual 4K display support, enabling extended, mirrored, or independent content across two screens. Ideal for multi-presenter meetings or side-by-side comparisons, the HUB30 allows two devices to stay connected and seamlessly toggle control—perfect for enterprise and education environments.



Seamless Touch Control with CP10 G2



Enhance room control with the AVer CP10 G2 touch panel, offering rapid source switching, precise volume management, and customizable presets. This intuitive interface streamlines meetings and delivers unified control of the HUB30 and connected AVer peripherals across any collaboration space.

Specifications

Display	
Input 1	USB Type-C x 1 (PD Charging, 100W Max.)
Input 2	USB Type-C x1
Input 3	USB Type-B x1, HDMI x 1
Input 4	USB Type-B x1, HDMI x 1
USB-C Charging	Yes
USB Devices	
Connections	USB Type-A x4
USB Pass-Through	Yes
HDMI Display Outputs	
Output	2
HDMI Display Output Modes	2
Audio HDMI	Yes
Video	
Resolution	Up to 4K Ultra HD
Signal Type	DP Alt Mode, HDMI 2.0
HDMI CEC	Yes
Color Space	RGB, YCbCr
Audio	
Transmit Mode	Audio Pass-Through from Input to Output
Format	HDMI 2.0
Control Interfaces	
Ethernet	1
HDMI Display Output Modes	1
Touch Control Panel	Yes, Can Be Paired with AVer CP10 G2 via BYOM Controller App
Package Contents	
HUB30, Power Adapter, Power Cord, Cable Fixing Plate (x 2), Cable Tie (x 17), M3 x 5.0 mm Truss Head Screw (x 8), M3 x 10 mm Screw (x 4), Rack Mount Bracket (x 2), USB 3.0 Type-A to Type-B Cable, USB 3.1 Type-C to Type-C Cable, Terminal Block 3-Pole, Quick Start Guide	
Optional Accessories	
AVer CP10 G2 Collaboration Touch Panel	

General	
Power Requirement	AC 100 - 240V to DC 24V/7.5A
Power Consumption	150W
Powering	External 180W Power Supply
Dimensions (W x H x D)	270.0 x 42.4 x 175.0 mm
Net Weight	1.34 (±0.1) Kg
Security	Kensington Slot
Operating Conditions	Temperature: 0 °C to +45 °C; Humidity: 20% to 80%
Storage Conditions	Temperature: -20 °C to +60 °C; Humidity: 20% to 95%
Installation Methods	Rack Mounted, Under the Table, Inside the Podium, Behind the Display
LED Indicators	
Power/Status LED	Orange: Standby Green: Operating Green (Flashing): Firmware Upgrading
USB Type-C Charging/Status LED	Green: Charging
Input 1/2/3/4	Green: Connected
Output 1/2	Green: Connected
General	
USB Type-A	4
USB Type-B	2
USB Type-C	2
HDMI In	2
HDMI Out	2
RJ-45	1
RS-232	1
Power Input	1
Button	2 (Power, Reset)
Warranty	3 Years

*Specifications may vary depending on location and are subject to change without notice.

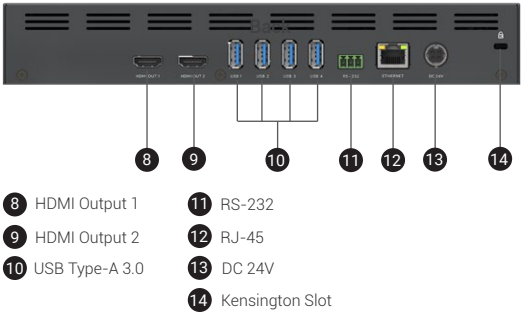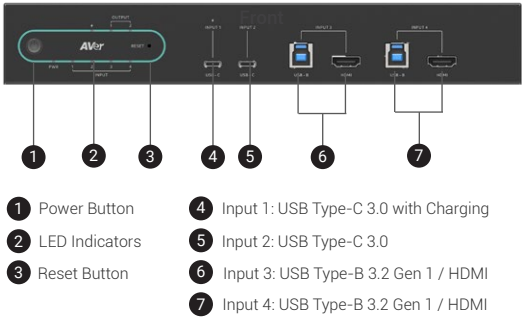

AVer Information Inc. Americas
44061 Nobel Drive, Fremont, CA 94538
Toll free 1.877.528.7824 T 408.263.3828 F 408.263.8132