




TR313V2

AI Auto Tracking

12X 4K PTZ Streaming Camera

NDI HX2



Professional PTZ Camera Provider



Great Video. No Compromises.

The AVer TR313V2 AI Auto Tracking Camera delivers professional-grade lectures, sermons, trainings or whatever you need to stream! The 12X optical zoom, powerful 8MP camera and 4K resolution offer the range and picture quality to produce the highest quality productions. The advanced artificial intelligence (AI) technology allows you to track your speaker (full or half body) or pre-set shoot zone without a dedicated camera operator.

With 3G-SDI/HDMI/IP/USB output, PoE+, Visca control, and compatibility with all popular video platforms, you have all you need to connect with ease in any environment. Includes a ceiling mount to keep clear of live audiences below.

Our industry-leading AVerCare warranty program offers 5 years protection and 24-hour replacement to give you total peace of mind.



3 Auto Tracking Modes



12X Optical Zoom



3G-SDI, HDMI, IP, USB Output



4K Resolution



8MP Picture



Wide Dynamic Range

Supports NDI/HX2

Take advantage of the power of NDI/HX2 format with built-in encode support for your connected devices.




Presenter Tracking

- Capture every interaction
- Either track full body or half body
- Simple click to track and manually follow an additional presenter via remote control or Web UI



Zone Tracking

- Establish preset zones
- Create video focused on content
- Enhance the capture of content on multiple displays

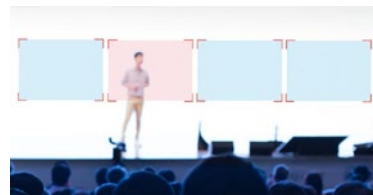

Hybrid Mode

- Camera auto switch between Presenter vs Zone mode
- Combines the best features of Presenter and Zone mode
- Flexibility of tracking presenter freely or fixed content




Wide Dynamic Range


The Wide Dynamic Range (WDR) of the camera uses special algorithms to balance dark or bright lighting for one clear image.



Tally Light

Simplify multi-camera live video productions with an illuminated red light on the active camera.

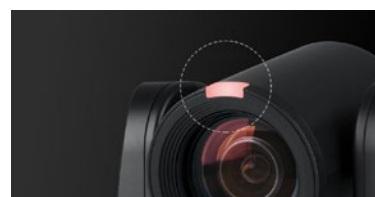



Free Software for Users and AV Managers

Whether you need a simple tool to control your PTZ or TR camera, or manage over a hundred on your network, AVer has great options. [CaptureShare](#) and [PTZ Management](#) for desktop and [Aver PTZ Control Panel](#) for iPad have you covered. For new voice tracking features, look to [PTZ Link](#). Visit our [support page](#) for easy download of our desktop software.


Compatible Software



Product Specifications

Camera	Sensor Size	1/2.8" CMOS
	Pixel	8MP
Output Resolution	Resolution: 4K*/1080p/720p	
	Frame Rate: 60/59.94/50/30/29.97/25	
TV Line	*So far 4K can only support 30/29.97/25	
	1400 (center/wide)	
Focal Length	f=3.9 ~ 46.8mm	
Iris	F=1.6 (Wide) ~ 2.8 (Tele)	
Optical Zoom	12X	
Digital Zoom	12X	
Total Zoom	144X	
D FOV	78° (wide) ~ 7° (Tele)	
H FOV	70° (wide) ~ 6° (Tele)	
V FOV	42° (wide) ~ 3° (Tele)	
Minimum Illumination	0.5 lux (50 IRE, F1.6, Max. AGC, 1/30)	
Minimum Working Distance	Wide 0.3m, Tele 1.5m	
Focus	Auto/Manual/One Push	
White Balance	Auto/Manual	
Gain	Auto/Manual	
Shutter Speed	1/1 s to 1/10,000 s	
BLC (Back Light Compensation)	Yes	
Exposure	Auto, Manual, Priority AE (Shutter, IRIS), BLC, WDR	
Noise Reduction	2D/3D NR	
Frequency	50Hz & 60Hz	
S/N Ratio	≥50dB	
Image Effect	Mirror/Flip Freeze/WDR/BLC	
WDR (Wide Dynamic Range)	Yes	
Parameter	Pan Angle	-170° ~ +170°
	Tilt Angle	-30° ~ +90°
Pan Control Speed	0.1 ~ 100°/Sec	
	0.1 ~ 100°/Sec	
Preset Speed	Pan: 200°/Sec, Tilt: 200°/Sec	
Preset Number	10 Locations by Remote, 256 vis RS232	
IP Streaming	Resolution (Max)	4K (30FPS)
	Video Compression	H.264, H.265, MJPEG
Audio Compression	AAC, PCM	
	Protocol	IPv6, IPv4, TCP, UDP, ARP, ICMP, IGMP, HTTP, DHCP, RTP/RTCP, RTSP, RTMP, VISCA over IP
Bitrate	512Kbps ~ 32Mbps	
Bitrate Control Mode	VBR/CBR	
Multi-stream Capability	4K mode:	
	4K30*1, 1080P30*1, 720P10*1	
1080P60 mode:	1080P60*1, 1080P60*1, 720P10*1	
	NDI* HX3 capability	Yes
SRT Protocol	Yes	

I/O Interface	Video Output	3G-SDI, HDMI, IP, USB
	Audio Output	3G-SDI, HDMI, IP, USB
Audio Input	MIC in/Line in	
	Baud Rate	2400, 4800, 9600, 38400
Control Interface	RS232/RS422/IP	
	Control Protocol	VISCA/PELCO-D (RS232/RS422/IP), CGI (IP)
Network Interface	10/100/1000 Base - T	
	USB	3.0
POE+	PoE+ (IEEE802.3at)	
	Power Requirements	12V
USB	Connector	USB3.0 (typeB)
	Video Format	MJPEG, YUV
Resolution (Max)	2160P	
	Video Class	UVC 1.1
Audio Class	UAC 1.0	
	Channel	2ch (stereo)
Codec	AAC-LC(48K)/PCM(8K)	
	Sample Rate	48Khz
System	IR Remote Control	Yes
	Tally	Yes
Kensington Lock	Yes	
	Power Consumption	18W
Operating Temperature	0°C ~ +40°C	
	Operating Humidity	20%~80%
Storage Temperature	-20°C ~ +60°C	
	Storage Humidity	20% ~ 95%
Dimensions	W180*D145*H192mm	
	Net Weight	2.0 kg (+/-0.1) (4.4 lbs)
Application	Indoor	
	Accessory	Remote control, 12V power adapter, power cable, Din8 to D-Sub9 cable, RS232 in/out cable, screw for mount, ceiling mount, cable fixing plates, quick guide.
Software Tools	PTZ Management, PTZ Link, OBS Plug in, Control panel, CaptureShare.	
	Warranty	Camera 5 Years
Accessories	1 Year	
	Tracking	Mode Presenter, Zone, Hybrid
Mechanism	Human detection (half or full body)	
	Ordering Info	Part Number PATR313V2



AVer Information Inc. Americas
44061 Nobel Drive, Fremont, CA 94538
Toll free 1.877.528.7824 T 408.263.3828 F 408.263.8132

©2021 AVer Information Inc. All rights reserved.
All brands and logos are trademarks of their respective companies. Specifications subject to change without notice

pro.averusa.com