



CL01

**Professional**PTZ Camera Controller

**Take Control of Your Video** 

Take control of your productions like a pro with this robust and intuitive solution to manage your video capture and broadcast needs. Compatible with all AVer Auto Tracking and PTZ cameras and a variety of other brands. With a simple configuration to manage up to 7 cameras, the CL01 provides the power of a mini studio on your desk.





255 Operate 255










An All-in-One Controller to Meet Your Unique Production Needs





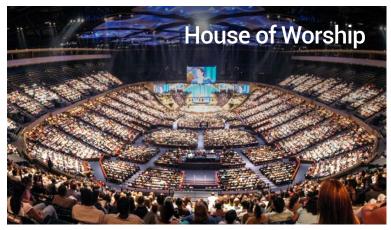



## **Product Specifications**

I/O Interface	Communication	RS-485, RS-422, RS-232, IP, Micro USB for firmware upgrades
	Baud Rate	2400, 4800, 9600, 19200, 38400 bps
User Interface	Display	OLED display screen
	Rotation Button	3
	Camera Shortcut Channel	7
	Joystick	1
	Keyboard	Backlit Keys
Camera Control	IP Address	Default: 192.168.1.162 / 163 / 164 / 165 / 166 / 167 / 168 (from Cam 1 to Cam 7)
	UDP Port	52381
	Cam ID	1 to 7 and more (255* max.)
	Control Protocol	VISCA, SONY VISCA , Pelco-D/P, UDP, IP (VISCA over IP)
System	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
	Dimensions	173 mm (W) x 99 mm (H) x 350 mm (D)
	Gross Weight	2.5 kg
	Power Source	DC 12V/2A, AC 100–240V
	Power Consumption	24 W
	Application	Indoor
	Package Content	User manual / 4-pin RS485 terminal / power adapter
	Part Number	PTCAMCTRL

<sup>\*</sup> After setting up the multi-channel function, select the camera and then press CAM 7 to start controlling it. Specifications may vary depending on location and are subject to change without notice.

## **Hardware Specifications**



